



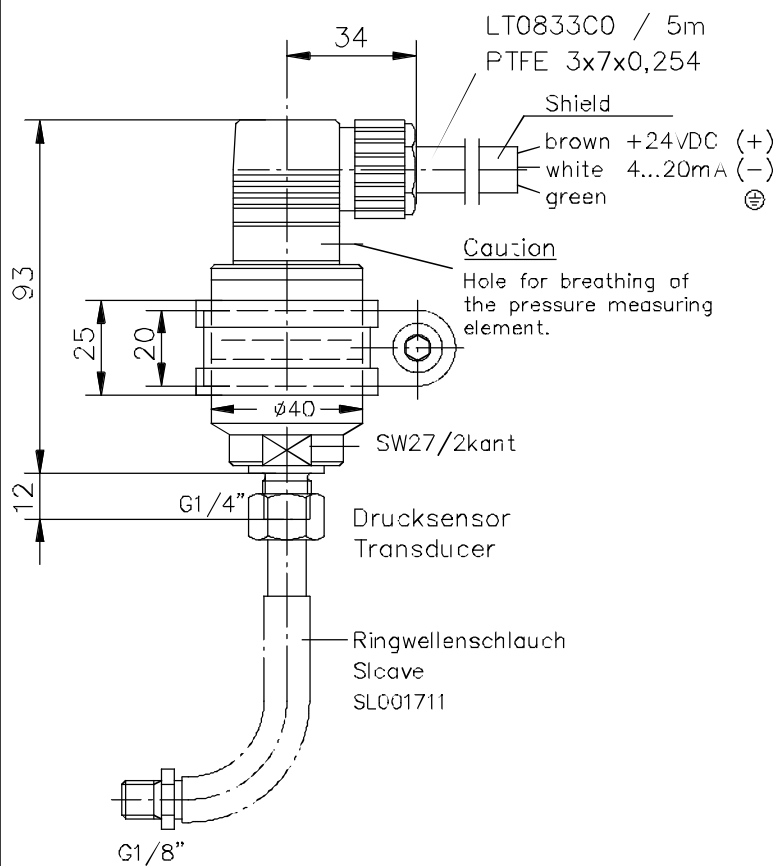

Connection 4...20mA 2-Leiter




PIN1 Signal+ = brown
PIN2 Signal- = white
⊕ PE = green

Technical Data

supply voltage U_B	18...32VDC
residual hum	< 10%
current consumption	< 30mA
corresponding output current	4...20mA
load resistor R_{Lmax}	< 500R
wrong polarity protection (supply lines)	yes
operating temperature	0 °C ...+70 °C
protection class	IP 67

Rohrschelle mit Gummiprofil
Clamping device with Rubber profil

mounting inside existing Systems
by clamp rings

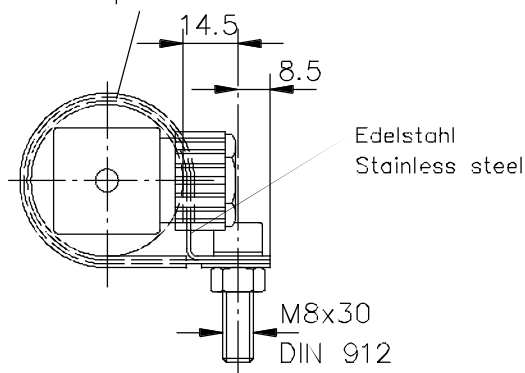

CAD Nr. TGL01431-1-05

Tag	Name
Gez. 23.04.18	Mößler
Gepr. 23.04.18	Ghazouani
Norm	

Z.-Nr.

TGL01431-1-05

Maßstab

1:2

Benennung

Anordnung Drucksensor
Design pressure transducer

Ersatz für

Ersetzt durch



Dr. E. Horn GmbH & Co. KG
D-71101 Schoenaich

e	d	c	b	a	Änderung	Tag	Name