Diesel Spin-On - 120RMAM Series

FUEL

Specifications:

5.65" (14.35 cm) Height: Width: 3.2" (8.13 cm) Depth: 3.31" (8.4 cm) Weight (Dry): 1.4 lbs (0.64 kg) Fuel Flow Rate: 15 gph (57 lph) Ports: 1/4-18 NPTF Service Clearance: 2.0" (5.1 cm)

Create a Part Number

(hd) **Mounting Head** Port 15 gph (57 120R

DESCRIPTION

ASSEMBLIES

120RMAM2

120RMAM30

Marine - Metal Bowl Bowl Material MAM


FF/WS, Marine Metal Bowl, 15 gph Flow Rate, 2 Micron Filtration

FF/WS, Marine Metal Bowl, 15 gph Flow Rate, 30 Micron Filtration


Micron Rating 2


30 Micron 30


Dimensions:



120RMAM Top






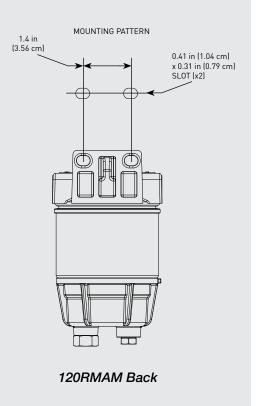




PARTS

Diesel Spin-On - 120RMAM Series



	Part #	Description
1A	RK 10110	Vent Plug Kit - 3/8-24 SAE Plug
1B		120 Series Head Assembly
2A		Square Cut Gasket - Included in 2B
2B	R12SUL R12PUL	120RMAM2 Replacement Filter - 2 micron - <i>Includes 2A, 2C</i> 120RMAM30 Replacement Filter - 30 micron - <i>Includes 2A, 2C</i>
2C		Bowl O-ring - Included in 2B & 3A
ЗА	RK 10226	Replacement Metal Bowl Kit - <i>Includes 2C, 3B, and 3C</i>
3B		Bowl Drain Port Plug Kit
3C		Bowl WIF Port Plug Kit



<u> </u>		RK23
	4B	RK 20
<u>2B</u>		

Additiona	Parts	(not s	hown)
-----------	-------	--------	-------

4A	RK30880E	WIF Sensor/Detection Kit - 1/2"-20 UNF	
	RK23191	WIF Stainless Steel Probe Kit (1/2"-20 SAE - UL Listed/ABS Marine Type Approved) - No Internal Resistor, 12/24V - Requires Water Detection Amplifier - See RSL7501 for available Probes, Sensors, and Amplifiers	
4B	RK 20726	Water Detection Module Kit - 12 or 24 vdc - <i>Includes Amplifier (Light and Buzzer) & RK 21069 (WIF Probe)</i> See RSL7501 for available Probes, Sensors, and Amplifiers	

3A 3B 3C

> Online Link Diesel Marine Spin-On Product Selector

