

Sea Recovery Atlantic Sea Series

Safe, Reliable, and Supported
Anywhere in the World



The Atlantic Sea is Parker Sea Recovery's Largest series of standard Sea water Reverse Osmosis systems. Its features include a small footprint and fully-automatic controls with the capacity to 1,200 metric tons per day. The Atlantic Sea also boasts the lowest consumption of energy per ton of water produced in the market. This is perfect for those who require an unlimited amount of fresh water anywhere at anytime.



Atlantic Sea Series

Contact Information:

Parker Hannifin Corporation
Water Purification
2630 E. El Presidio Street
Carson, CA 90810

phone 310 608 5600
fax 310 608 5692
www.parker.com/waterpurification

Sales & Customer Support:
bwf.car.support@support.parker.com

Technical Support:
bwf.car.technical@support.parker.com

Product Features:

- Mega production-1,200 metric tons and above per day
- Digital control with standard MODBUS
- Low-maintenance HP pump
- Energy Recovery
- One-touch start up with instant-on feature



ENGINEERING YOUR SUCCESS.

Efficiently Productive




From its fully-automated controller to its low-maintenance HP pump and its energy-recovery system, the Atlantic Sea effortlessly delivers high production capacities. Its automated controller is easy to operate and enables real-time remote monitoring of essential system functions.

The Atlantic Sea's high-pressure pump is the most compact and efficient pump on the market. Its flexible installation doesn't require frames, belt drives or gear boxes. The HP pump is corrosion-resistant and completely eliminates oil leaks and membrane fouling caused by oil leaks.

The Atlantic Sea is capable of instant-on start-up that allows the system to produce usable, fresh water within minutes.

Specifications

A700 Daily System Production	Production/Hour	Production/24 Hrs.
250 M3 /day	2,752 gal	66,043 gal
300 M3/day	3,302 gal	79,252 gal
400 M3/day	4,403 gal	105,669 gal
500 M3/day	5,504 gal	132,086 gal
600 M3/day	6,604 gal	158,503 gal
750 M3/day	8,255 gal	198,129 gal
1000 M3/day	11,007 gal	264,172 gal
1200 M3/day	13,209 gal	317,006 gal

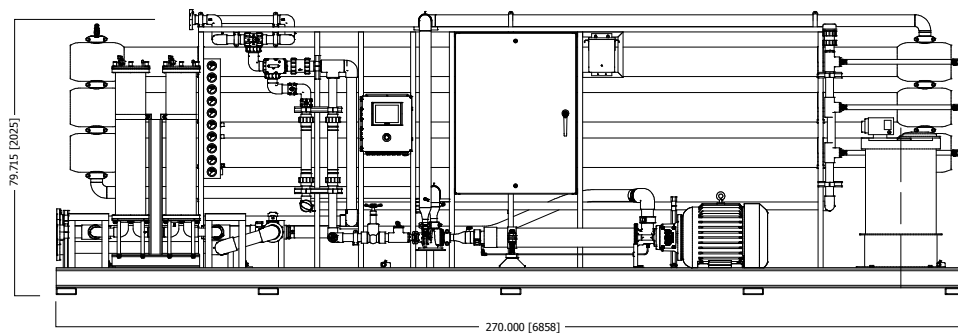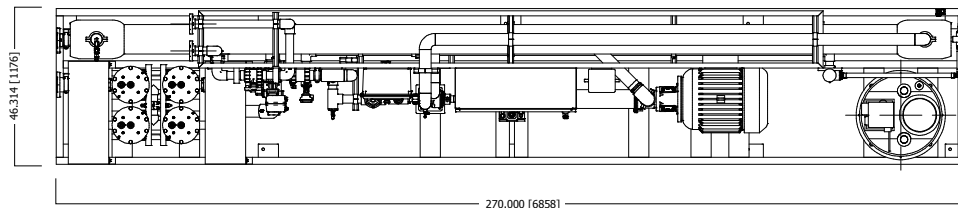

To maintain peak performance, always use genuine Parker Sea Recovery replacement parts. We reserve the right to change our specifications or standards without notice.

⚠ WARNING: This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

